

DOUBLE CAPE COD RAIL GATE

Double Gate Configuration

(4' & 8' WIDE 46" HIGH GATES)

REAR EYE HINGES (Product Codes #8324)

GATE HUNG BETWEEN POSTS


Distance between gate and hinge post	A
Width of Left Gate	B
Distance between gates	C
Width of Right Gate	D
Distance between gate and hinge post	E
Total distance between posts	F

Hardware Required									
	Galvanized Finish	Black Powder Coat over Galvanized Finish	Rear Eye Hinge Advantages Opens 180 degrees Incredible amount of adjustment Easy operation & Very Strong Minimal distance between gate and post						
Hinge Sets	1 of 8324-S122 & 1 of 8324-S242	1 of 8324-S12P & 1 of 8324-S24P							
Fasteners included with straps	Two Sets Include: two 12" double strap (8324-122 or 8324-12SP) two 24" double strap (8324-242 or 8324-24SP) four mounting plate with 8" adjustable threaded pins(8256-342 or 8256-34P)								
Mounting Plate Fasteners*	4 of FP-8256-G	4 of FP-8256-B							
Cane Bolt (Vertical)**	1 or 2 of 5000-242	1 or 2 of 5000-24SP							
	Central Latch Options		Dimensions (feet and inches)						
			A	B	C	D	E	F	
Throw Over Gate Loop	4200-032	4200-03SP	1"	4'	1"	8'	1"	12' 3"	
Slide Bolt Latch	5002-L122	5002-L12SP	1"	4'	1"	8'	1"	12' 3"	
Lumber Required									
Posts	2 of 10' x 6" x6" (usually dressed out at 5.5" x 5.5")								
Rails, Stiles (uprights) and Diagonals made from full 1" thick by 5.5" wide lumber (commonly stocked decking material or rough cut lumber)									
Rails	6 of 8' x 1" x 5.5"								
Stiles	6 of 8' x 1" x 5.5"								
Diagonals	2 of 8" x 1" x 5.5" and 2 of 10' x 1" x 5.5"								
Filler blocks for bottom hinge	3 of 12' x 1" x 5.5" (Parts E,F,G and H on Plan Layout)								
Fasteners Required for Gate Construction									
2 of FP-CapeCod- Fastener Pack for Cape Cod Gate Build (Each pack includes 50 of 1.75" wood screws, 18 of 3.5" HDG carriage bolts nuts and washers)									
*Mounting Plate Fasteners - 20 of 3/8" carriage bolts for posts up to 5.5" thick OR Purchase separately 20 of 3/8" lag bolts (minimum of 4" long)									
**One 24" Cane Bolt (5000-242 or 5000-24SP) is required for central stability. Two are needed if you require a means of keeping the gates open.									


SNUG COTTAGE HARDWARE

Download includes this materials list, component cutting and layout sheet, tips on installing gate posts, and detailed instructions.




For a complete listing of our free gate plans and gate layouts visit snugcottagehardware.com.

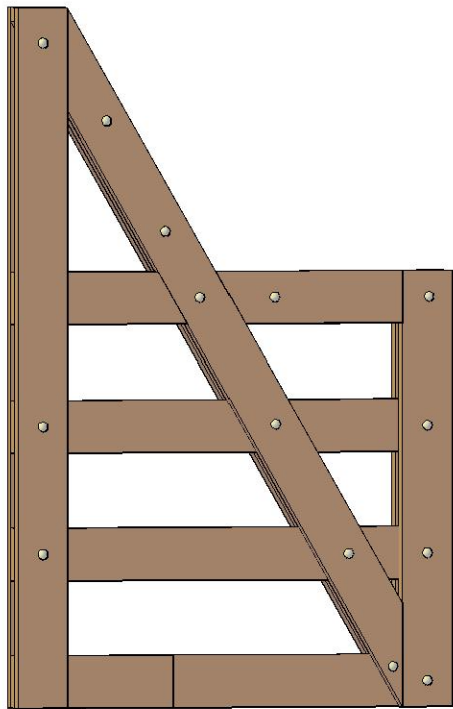


FLAT FRONTAL VIEW



THREE LAYERS




COMPONENTS (FULL 1" THICK x 5-1/2" WIDE)

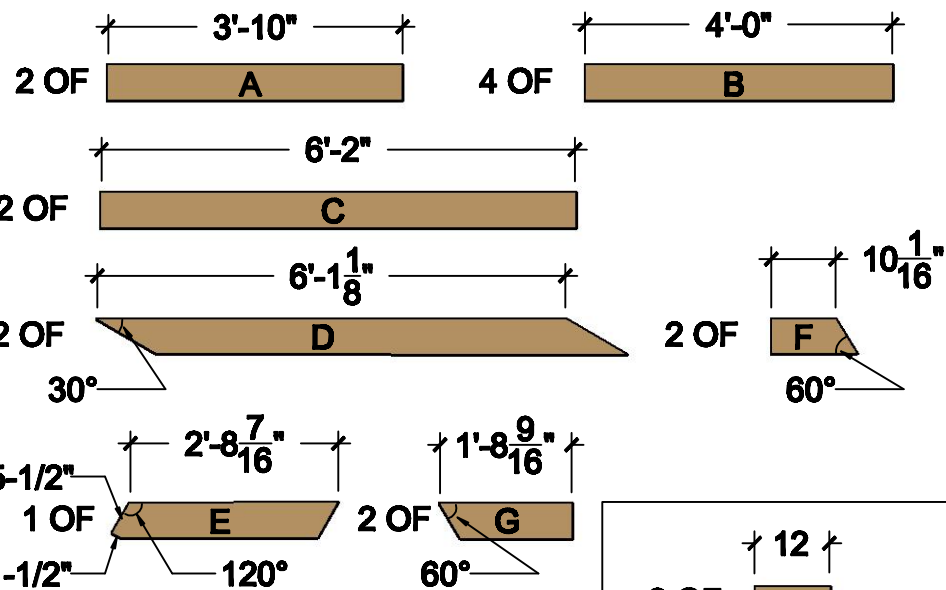


Snug Cottage Hardware
4' Cape Cod Board Gate

2 OF 12
For Rear Eye
Hinge Only

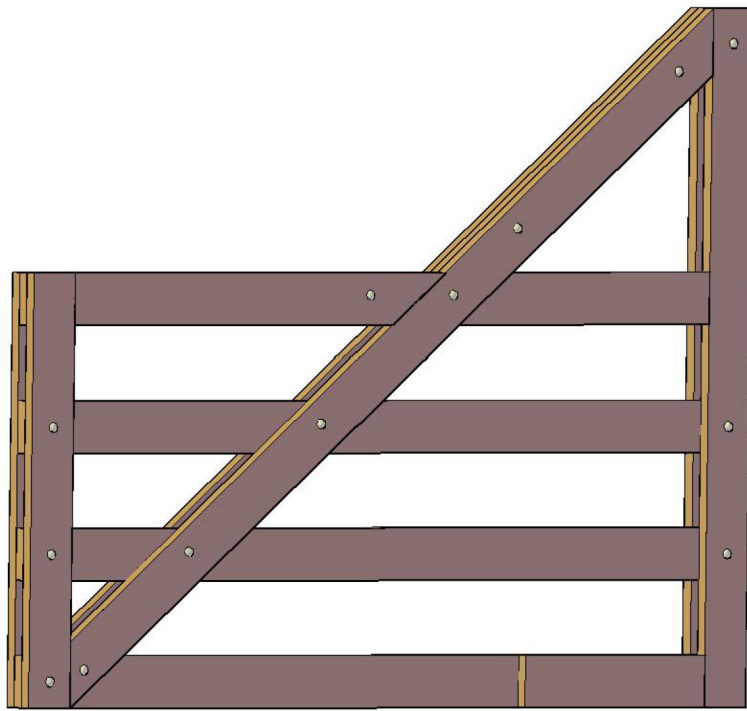


COMPONENTS (FULL 1" THICK x 5-1/2" WIDE)

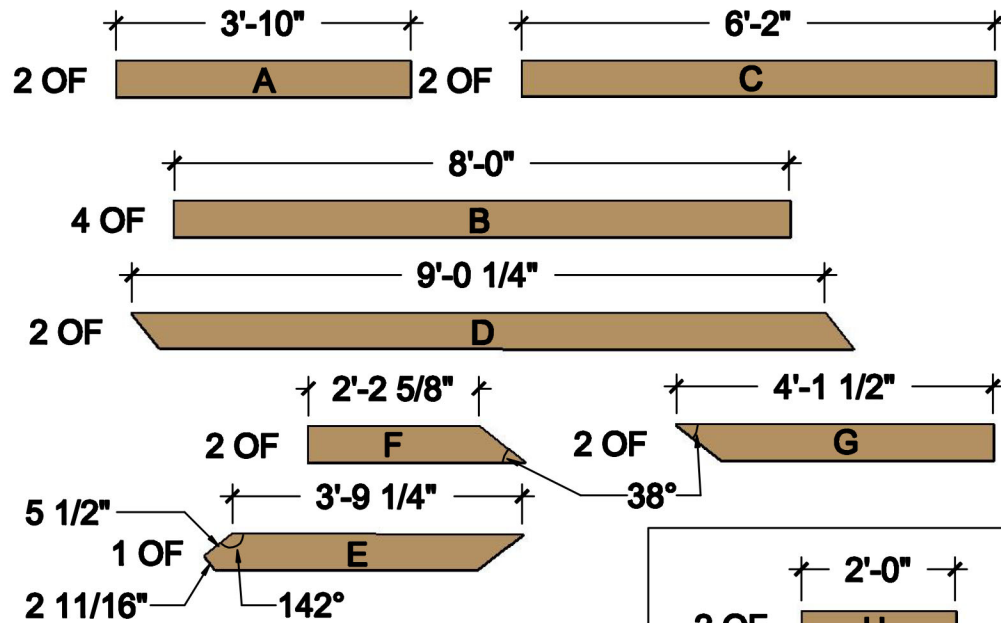

Snug Cottage Hardware
8' Cape Cod Board Gate

2 OF For Rear Eye Hinge Only

FLAT FRONTAL VIEW

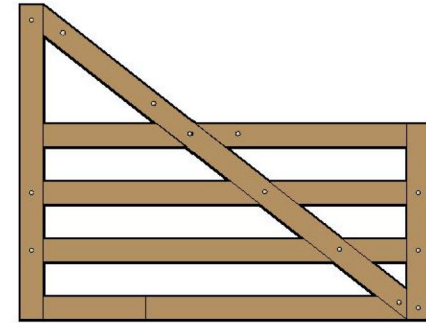

THREE LAYERS

